




BESKRIVELSE

188CRM

Kontraventil til vand, olie og trykluft, afzinkningsfri messing legering i henhold til BS 6282/1.

Klemringstilslutninger i henhold til BS 864.2 til lodret og vandret montering.

DIMENSIONER

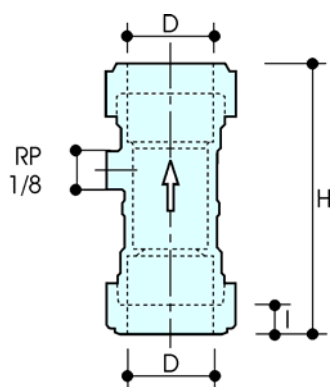

D [mm]	12	15	22	28	35	42	54
H	65.5	65	75	89	150	114	196
I	11.5	11.5	13.5	16	16	20	22
Gr.	134	111	181	277	950	599	2150

Alle gevind er i overensstemmelse med ISO 7/1 eller ISO 228

MATERIALER

Ventil	CuZn36Pb2As Cw602N (DIN 50930 del.6)
Kappe*	CuZn36Pb2As Cw602N (DIN 50930 del.6)
Kontraventil	Ocean kontraventil type "10"
Kompressions møtrik	CuZn36Pb2As Cw602N (DIN 50930 del.6)
Klemring	CuZn36Pb2As Cw602N (DIN 50930 del.6)
Stop ring**	CuZn36Pb2As Cw602N (DIN 50930 del.6)


*låg for check point

**kun størrelse 15 mm

VARIANTER

188	MxM, kontraventil
188NDA	MxM, kontraventil, afz.fri
188CRM	Kontraventil m/klemringe
488NDA	MxN, kort kontraventil, afz.fri

TRYKTABSDIAGRAM

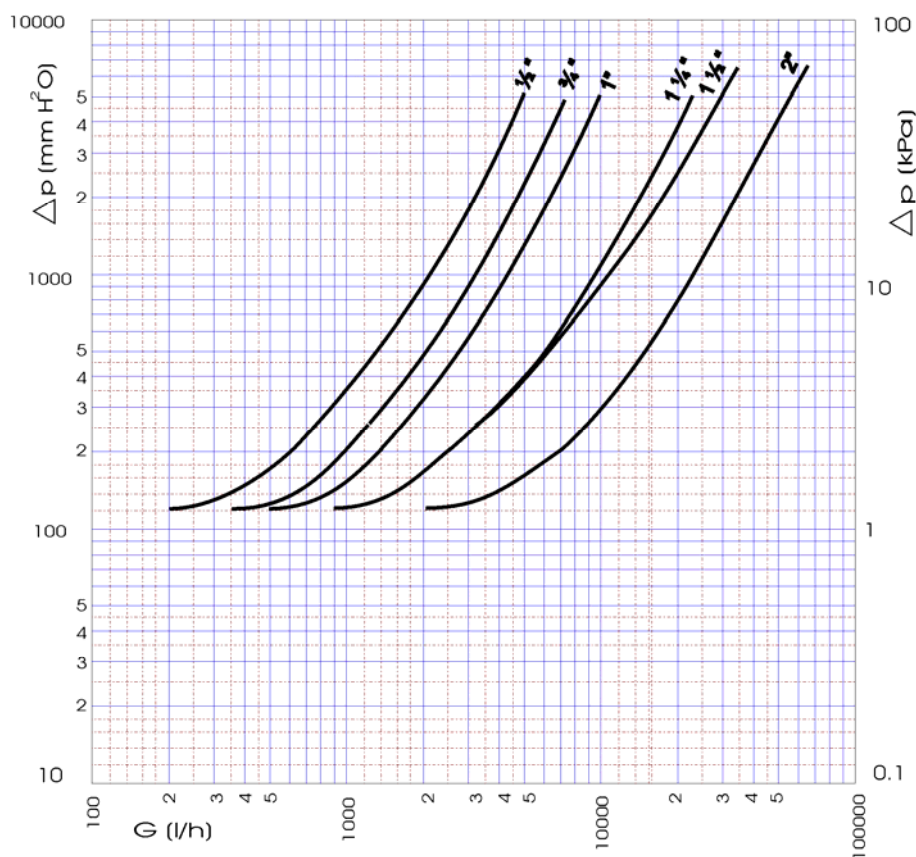

Dim.	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"
KV	5.5	10	15	30	43	80

ANBEFALET DRIFTSTEMPERATUR/ MAKSIMALTRYK

16 bar - 30°C - non shock
 6 bar - 100°C - non shock